



**BRING
OUT THE
BEAUTY. BRING
IN THE WOOD.**



SILK

For us, details aren't an afterthought. They're the main event. SILK solid interior trim and patterns are beautifully crafted from New Zealand's finest pine to give homes real-life dimension.

SOLID INTERIOR TRIM & PATTERNS



MATERIAL SPECIFICATIONS:

- Interior use only
- Solid CLEAR Radiata Pine
- Nickel Gap and WP4/ECB patterns
- 8'-16' lengths
- S4S 1X4-1X12, 5/4X4-5/4X8




COATING SPECIFICATIONS:

- Finish - two coats of 100% acrylic latex
- Sanded and buffed between coats
- Low V.O.C. interior friendly
- Field finish with latex top coats
- 15-year primer warranty




OFTEN IMITATED.
NEVER DUPLICATED.

PATTERN PROFILES

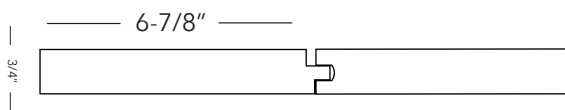

NICKEL GAP CM

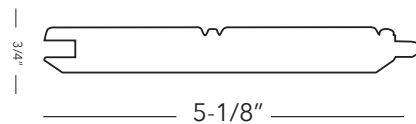

WP4/EDGE & CENTER BEAD

INSTALLATION TIPS:

- SILK is kiln dried to 10-12% MC, and can pick up ambient moisture in storage.
- Bring SILK trim into the area where it will be installed.
- Allow 4-5 days to "acclimate" prior to installation.
- Wider boards may require a center nail in addition to edge nailing.
- Blind nailing of 8" patterns is acceptable, however, for optimum stability, we recommend face nailing.

